

Swimming Pool Filtration system

Modern Pipeless Filters (Patented) & conventional Sand Filtration system

 Sand Filters: Sand filter water filtration with multi-port valves.

These are the filter used for more than 100 years. The basic principal is this that sand small particles stop the suspended impurity of water up to 30-40 micron and let water pass out of it. The casing of filter can be made of MS or fibre glass as per manufacturer parameter. There are two kind of sand filters, pressure sand filters and high rate sand filters. Pressure sand filters are big in size and give better filtration while high rate sand filters are small and give normal filtration which is good enough for swimming pool.



DESIGN FLOW RATE

DESIGNATED TO MAKE					
Model	Diameter (mm)	Height (mm)	Valve (mm)	Filter area sq. m	Flow rate
SF-625	625	780	38	0.30	9000 L/hr.
SF-750	750	910	50	0.45	13500 L/hr.
SF-900	900	1105	50	0.64	19200 L/hr.
SF-1000	1000	1225	50	0.70	23300 L/hr.
SF-1200	2000	1340	50	1.13	39000 L/hr.
SFC-1400	1400	1530	50	1.54	46200 L/hr.
SFC-1800	1800	1950	100	2.70	61000 L/hr.
SFC-2000	2000	2400	100	3.14	75000 L/hr.

Circulation pumps are to feed water to the filter from the swimming pool via the skimmers or the overflow channels. The water comes back to the pool as filtered and disinfected water.

The capacity of pump and motor is decided as per the size of pool. The prefilter is must to safe guard of pump.

29000 sq.m/IP 55 Class, F 0.5-3 Hp - 1 x 220 - 240 V 55



3. Disinfectants: Chlorine dozers, ozone and UV systems.

ANY pool water goes through the process of disinfecting. Three method individually or combined are used to disinfect the water of swimming pool.

Chlorine / Bromine: This is must for any pool as the disinfection is carried out with this method is most sought after and effective. The level of chlorine is to be kept 0.6 to 1.0 ppm level. (part per million)


Instruction of use chlorine is must as more chlorine does belching effect on skin and etching in eyes. And if it is less water is contaminated with bacteria and algae.





UV system: The water is passed to the UV rod under UV light and the bacteria got killed but only in that part and to inhibit the bacteria we need chlorine in very less dose.

OZONE GENERATOR: The ozone is also used for disnefection as it is produced with cell from Oxygen and feed into the piping of water flow for swimming pools. But need to contain and dosing is difficult in control manner and high dose of ozone is fatal.








HEAT PUMP: For Chilling & heating of swimming pool water.

neips us to withstand the expectations of our customers all over india of Abroad.

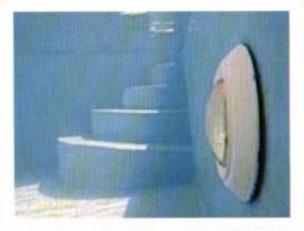

4. Under water lights: LED, HALOGEN, Color Changing lights.

swimming pool lights are water proof and made of plastic. These are surface mounted light fixed on the bracket in tiles or liner. For fibreglass pool these are pasted on the wall of swimming pool.

These light have step down transformer for safety and low voltage operation.



6. Swimming pool ladders and bars: 2-6 steps.


Pool ladder and safety side wall bar or steps bars are made of stain less steel with flat steps made of fibre glass for non skid and long life.

Side bar for pool is made of ss 304 and diameter is 25 mm.

Pool ladder made of 38 mm diameter SS-304 Tube.

Inlet jets, Drain grates


Water is filtered via filtration system and sent back to swimming pool via inlet nozzles.



Size of nozzles are 35mm or 50 mm in dameter. Two kind of jet nozzles are popular.








Overflow swimming pools needed drain gratting to cover the overflow channel.


Width of grating for medium size pool : 250mm wide with fixtures.

Width of Grating for large pools: 300 mm wide with fixtures.

Overflow Grating made of HD plactic with allow





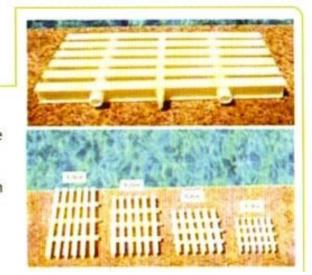

SWIMMING POOL ACCESSORIES





1. Fountain:

Mushroom Fountain: Made of fibreglass with plate form or without plate form. The size of Canopy is 1 meter diameter. The Height of fountain is 1500mm.

This can work with swimming pool or independently.



Diving boards: Fina design parameter for diving board 5m to 0.5 m






Water Sheet Fountain 600 mm height sheet fountain made up of fibre glass with inlet connection.



Back Stroke Indicator and False Start Rope

back stroke indicator are the flaged rope on the height of 1.8 meter of water level and get support with ss pole on both side.



Divider/racing float lanes:



For swimming competition, the floating lanes are the dividing lines among the swimmers.

These are anti wave and design in such a way that any flow of water does not move them from its place.

Two sizes of floats are available with diameter 100mm and 150 mm.

Length can vary from 10 meter to 50 meter.



Dolphin Fountain:

DOLPHIN FOUNTAIN is 1.2



Water Polo Goal Post:





Pipe Less Filter: Every swimming pool need water & for that to filter we need water filtration system. The dust enter in swimming pool are get cleaned by filter which settled on floor or dissolved in water which can not be seen with naked eye.

First medium is needed to clean the impurity from water and this is done by 3-4 kind of mediums 1. Sand 2. Cartridge, 3. DE and 4. Filter bag.

Second is the chemical composition of the water which make dust or impurity to settle down and also work for biological system of swimming pool. The alum and acid are added to keep the ph level of water ie 7.6 unit.

Third is to control the biological impurities of water. Water will spoiled after 3-4 days. So to keep water clean we need the disinfectants which are mostly Chlorine or Bromine and to keep the low level we may use ozone or UV disinfectant.

The entire principal of swimming pool water treatment revolved around above factors and we need to control them with various machines and filters.

In all of above process the cost of chemicals are high along with electrical power consumption. In sand filtration system we had to do back washing and that process throw the water and chlorine of swimming pool and new chlorine is to be added every time we do the back wash. So we waste water and chemical both.

In Pipeless filters we do not waste water & so maintenance cost is very low.

MINI PIPELESS FILTER


One filter good for pool size upto: 20x20 x 4 ft (400 sq. ft.)

Model No: AF- MINI-F-50

Patented Design

- Pipe less Filter of Capacity 5500liters/hour.
- One ½ hp motored pump.
- One CF-50 model filters with cartridge.
- 25 micron filtration with 4.2 sq meter surface area of filter. Under water light of 100w/12V



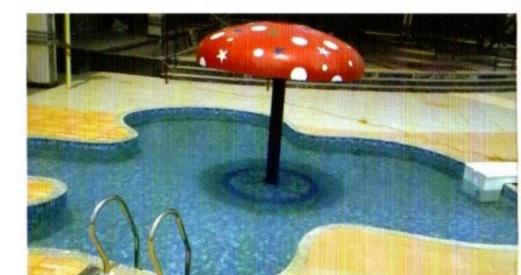





Mini pipeless filter

- Cartidge filter based 25 micron filtration good for 500 sq feet pool .
- Flow rate 5000/ hr.
- Depth minimum 600mm.



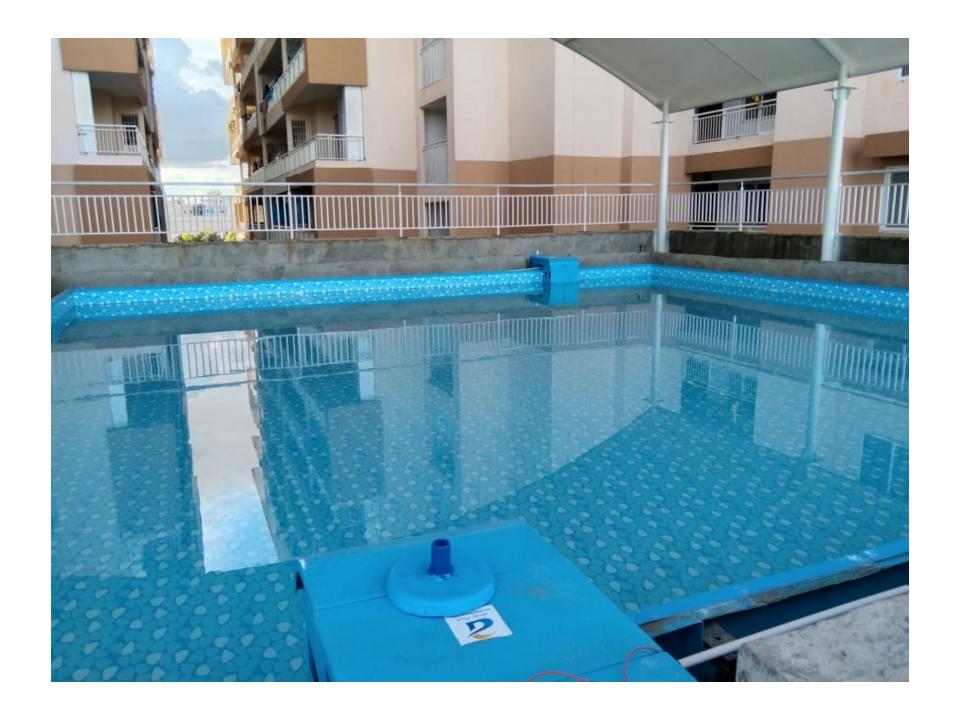



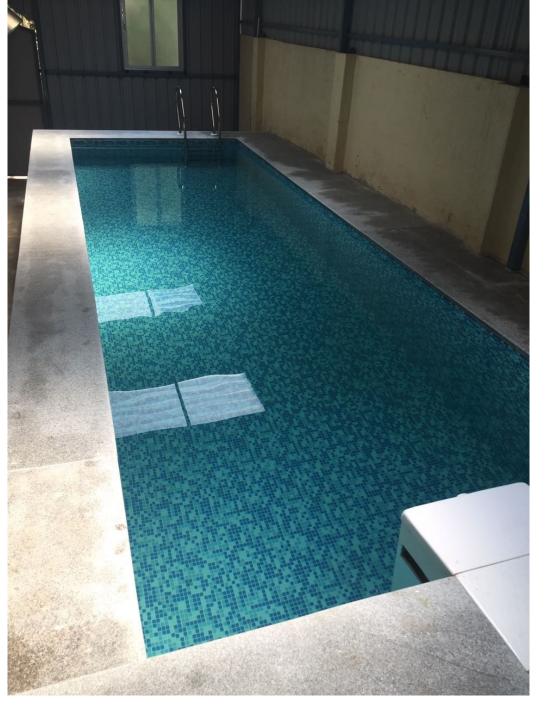









SWIMMING POOL PIPELESS FILTER - DECK MOUNTED FILTER



Deck Mounted Filter - Domestic

Make: Arrdevpools (patented design)

- One inbuilt skimmer and two filter water outlet nozzles on both sides.
- · One under water light 100w/12v with electronic transformer.
- · One hp motored pump.
- · One CF-50 model filters with cartridge.
- · Water proof electrical control box.
- Skimmer is at right/left side with nozzles at front side.25 micron filtration with 4.2 sq meter surface area of filter.
- · Three stage: a) skimmer/strainer/cartridge Filtration.
- · Colors: White/blue or as per requirement.
- Pool Size 20x25x4ft (500 sq. ft)
- Pipeless Filter 6000 L/hr
- Circulation Pump 1 HP
- Filter-4.2 sq. ft










All in one filter : 500 sq feet pool capacity



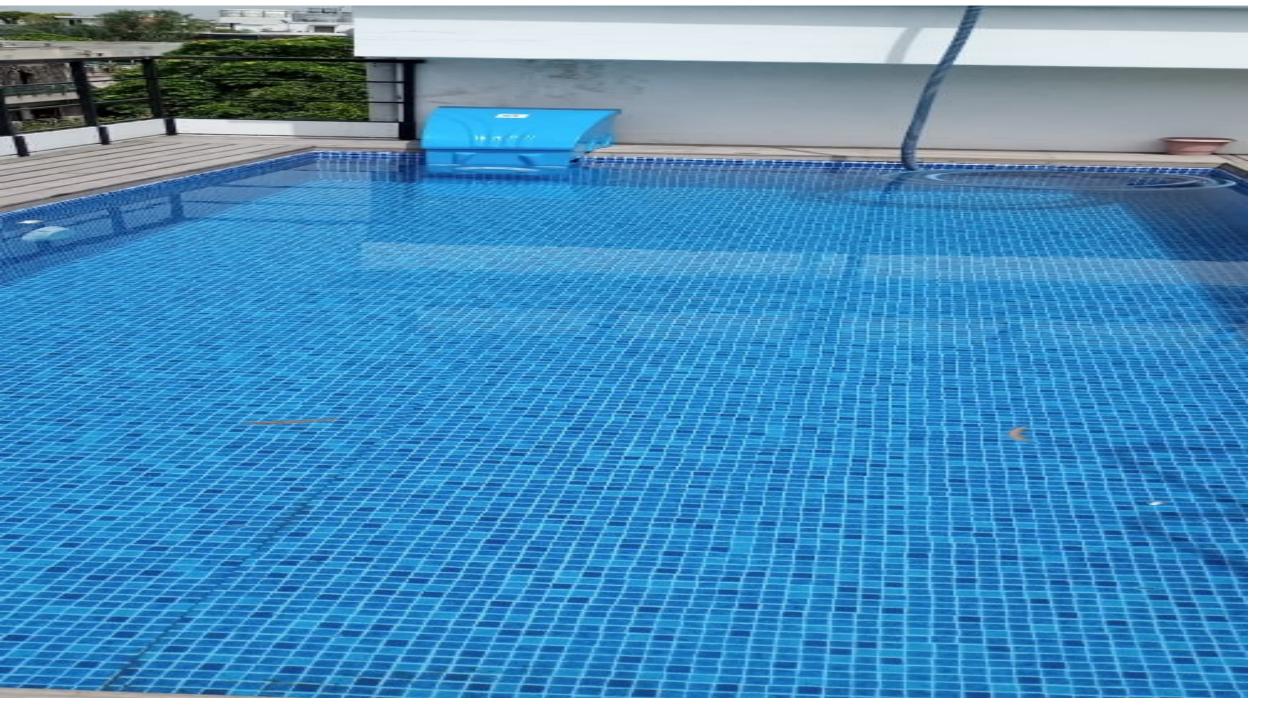



SWIMMING POOL PIPELESS FILTER - DECK MOUNTED FILTER



Deck Mounted Pipeless Filter - Commercial

In this model no cutting required at pool deck, the machines like filter and pumps are fixed on the deck of swimming pool. Useful and efficient for water bodies/swimming pool with depth more than 600mm and where wall is thick and no cutting is possible.

- Deck Mounted Pipe less FilterAF-13.5 DECK-F-50.
- Swimming pool of surface up to 600 sq. ft.(30ft x20ft x4ft) bigger pool the multiple unit is required.
- Filtration Capacity 10000liters/hour.Pump flow rate: 25000/hr.
- Filter 12.4 sq. feet
- Patented Design (fibre glass is not affected by chlorine, heat and cold).














SWIMMING POOL PIPELESS FILTER - RETROFIT FILTER



Retrofit Pipeless Filter

In this kind of filter no cutting required at pool wall, the machines like filter and pumps are fixed on the deck of swimming pool.

- Retrofit Pipe less Filter Model: AF-15Retro-F-100.
- One unit is for swimming pool surface up to 800 sq ft. (40ft x20ft x4 ft).
- For bigger pool the multiple units is required.
- Pump flow rate: 45000 liter/hr.
- Pipe less Filter of Capacity: 15000 liters/hr. (residential pools)
- One under water light 100w/12v with electronic transformer LED.
- One 1.5 hp motored pump.
- Two CF-50 model filters with cartridge.
- Water proof electrical control box.
- Skimmer is at side with nozzles at front side.
- 25 micron filter with 9.4 sq meter surface area of filter.
- . Three stage: a) skimmer/strainer/cartridge Filtration.
- Colors: White/blue or as per requirement(Customized).
- Fiber glass is unaffected from chlorine, heat & acids.

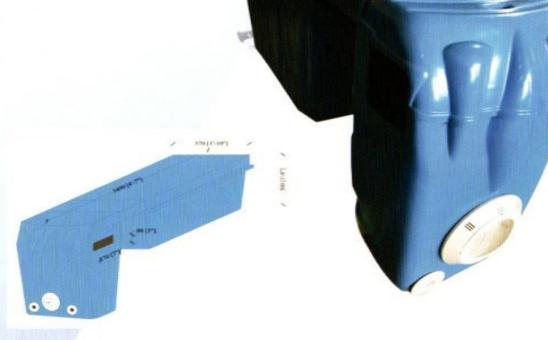










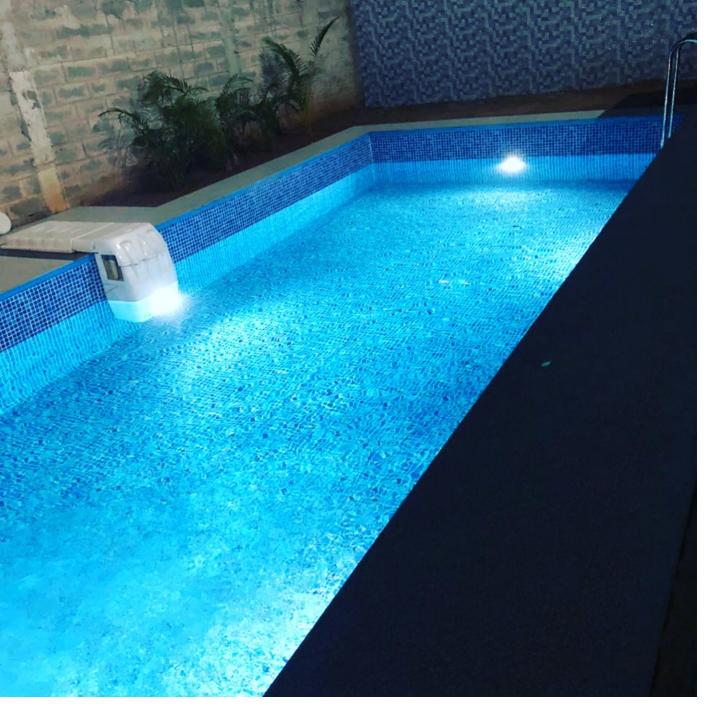







SWIMMING POOL PIPELESS - COMMERCIAL FILTER

Commercial Pipeless Filer

This filter is having the largest filter surface area of 14 sq meters. The flow rate is 2000 liters/sqm/hr. give the best filtration available all over world. This filter is the best suitable solution where high number of people are using pool or too dusty conditions.

- Wall Hung Filtration Unit Commercial Model Model: AF-24UniF-150.
- One unit is for swimming pool surface up to 900 sq ft.(45ft x20ft x4 ft) for big pools needed multiple filters.
- Pipeless Filter of Capacity 20000 liters/hour (Residential pools).
- Pump flow rate: 60000 liter/hr.







Arrdevpools make (This is compact system using the cartridge filter. These are fixed after completion of civil work in swimming pools.)


- One under light 100w/12v with electronic transformer.
- One 2.0 hp motored pump *two cf 75 model filters with cartridge.
- Water proof electrical control box.
- Skimmer is at front side with nozzles at right and left side.
 25-micron filtration with 14 sq meter surface area of filter.
 cartridge Filtration.
- Colors: White/blue or as per requirement (Custom made)
 Fiber glass is unaffected from chlorine, heat & acids. Side nozzle for aeration and fountain (Optional)









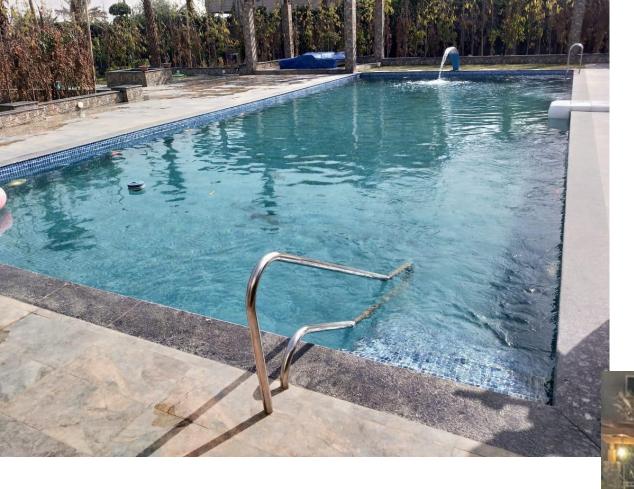









SWIMMING POOL PIPELESS FILTER - COMBO FILTER


Multi Functional Combo Pipeless Filter

This filter is multifunctional pipeless filter have inbuilt ladder, lights and complete electromechanical system.

- Multi-Functional Pipe less Filter (Combo Model) Model: AF-18UniF-75
- Swimming pool surface up to700 sq ft.(35ft x20ft x4 ft) for bigger pool the multiple units are required
- Filtration Capacity 9000 liters/hour. Pump flow rate: 30000 liter/hr.

Make & Features

- One inbuilt ladder three steps.
- · One under light 100w/12v with electronic transformer.
- One 1hp motored pump.
- One CF-75 model filters with cartridge, air safety valve and pressure gauge with 0-2kg/cm2 working pressure.
- · Skimmer is right side with nozzles in front and left side.
- · Three stage: a) skimmer/strainer/cartridge Filtration.
- Colors: White/blue or as per requirement (Custom made). Fibre glass is unaffected from chlorine, heat & acids. Side nozzle for aeration and fountain. (Optional)

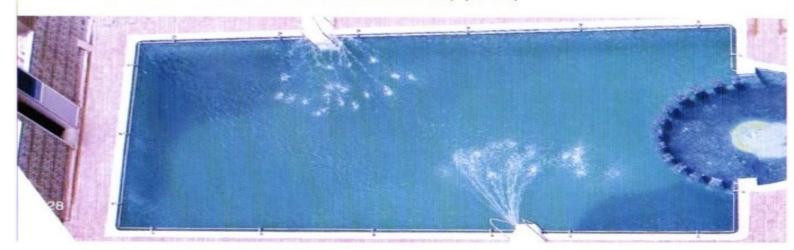





PIPELESS FILTER



PLF at Society NOIDA



CHAKAN Pool with PLF



Commerical Deck Mounted Filter in NODIA



Deck Mounted Pipeless Filter at BANGALORE



Liner Renovated Pool with PLF at HYDERABAD



Liner Pool TAMIL NAIDU



NASIK Pool with Liner & PLF



Pipeless Filter Hotel Lalit FARIDABAD



Pipeless Filter in Big Pool at SURAT



Pipeless Filter in Infinity Pool



-- I --- I ------



Dinaless Filter CONIDAT



Profab Pineless Pool




Deck Mounted Prefab Pool



Semi Oly Pool with



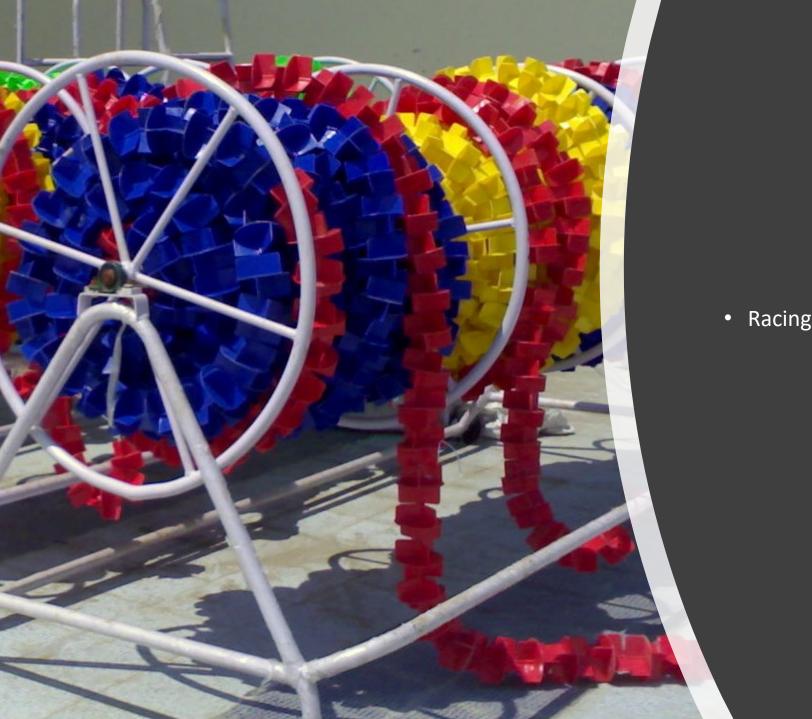

• Racing lane binder stand







Jacuzzi bed for concrete pool

 Jacuzzi bed for civil work swimming pool with jacuzzi jets



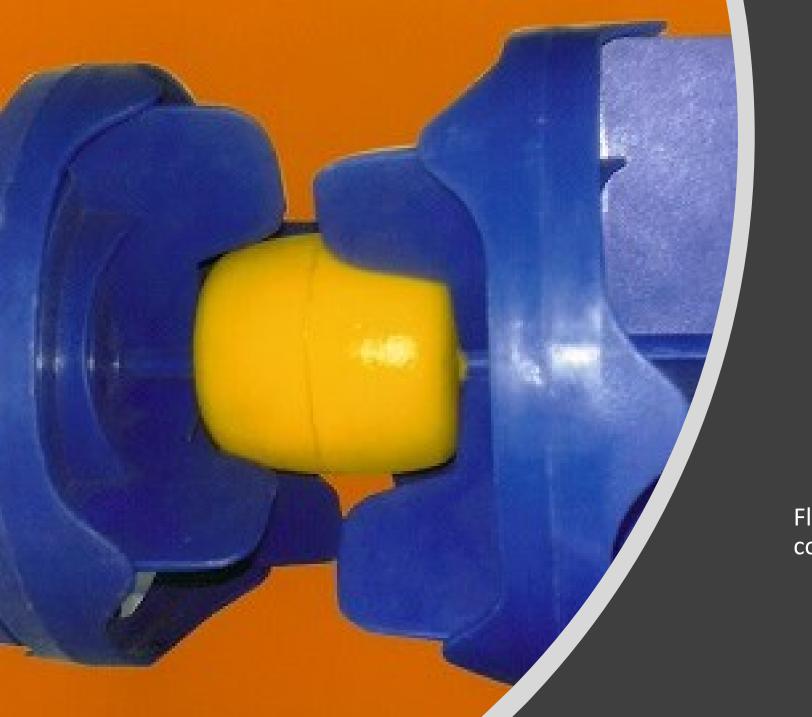

Floating lanes for swimming pool competition swimming

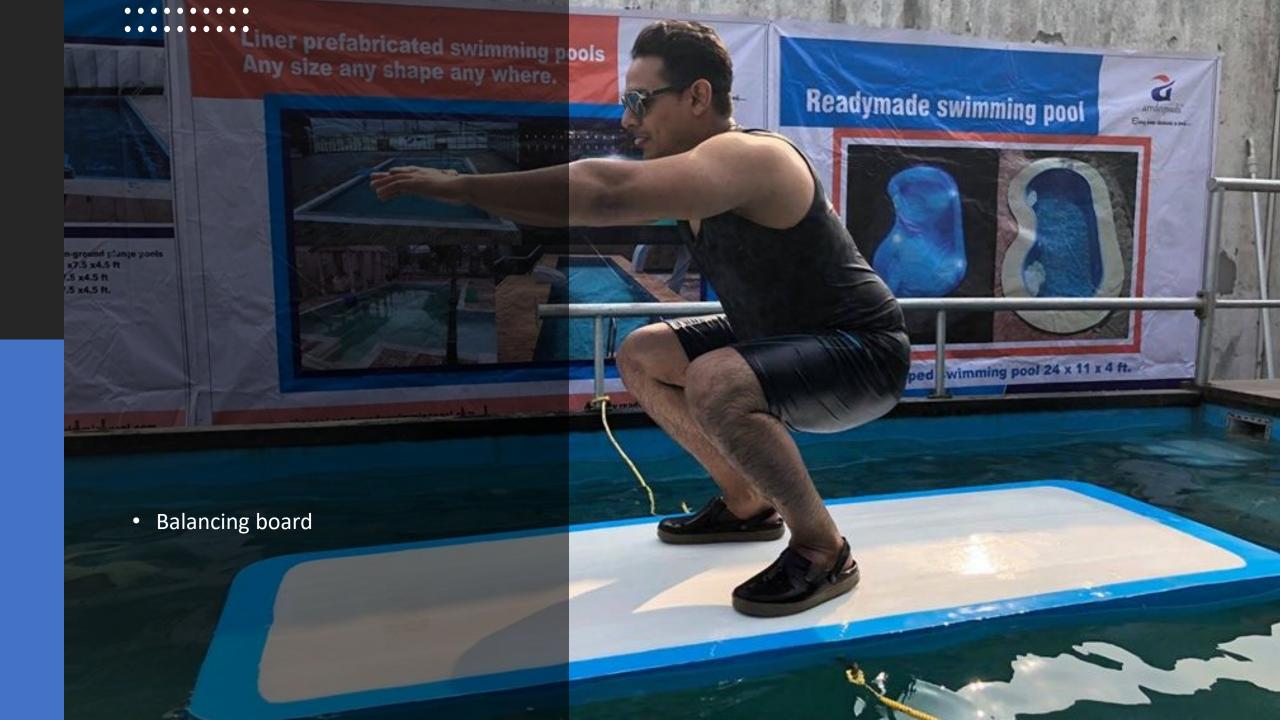




Starting blocks








Change room

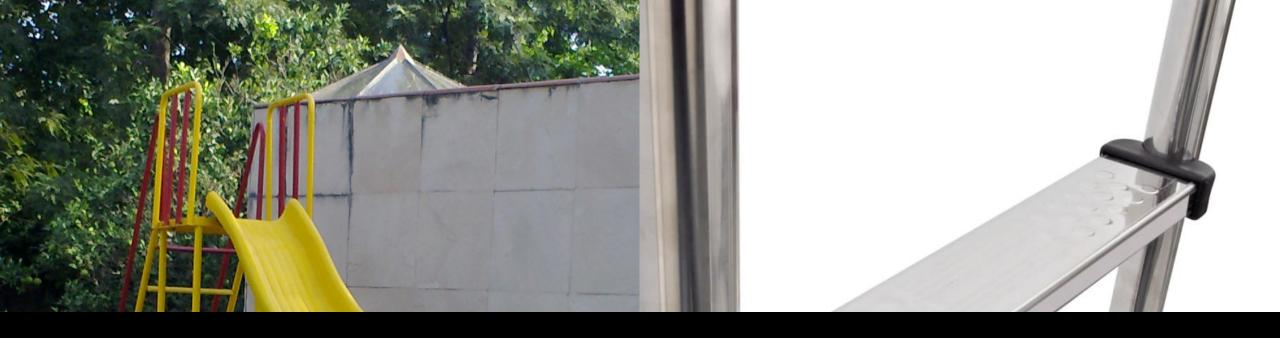

Pool ladder and slides



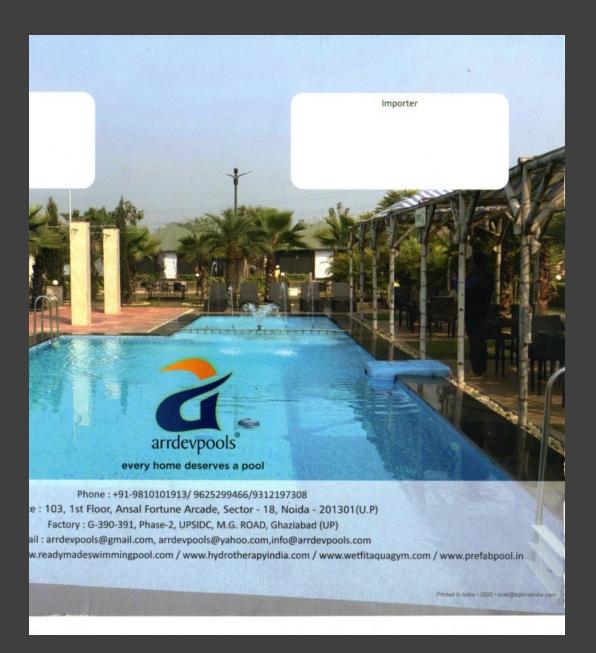

 Biggest Mfr of fibreglass swimming pools (Readymade). Liner swimming pool. (Any size any shape) in India. Same water for entire year. Best Cartidge based filters. Life Time Warrantee for 15 years. We request u to give your mobile no or email I'd India: 8700605929 West India: +91 96252 99466South India: +91 97385 94049 Vignesh Dealers and Export: +919810101913 Www.arrdevpools.comWww.wetfitaquagym. com

Arrdev International

- OFF: Arrdev House,SP 31 <Sector 130, NOIDA 201304(UP)
- F: G-390-391, Phase-2, UPSIDC, M.G. Road, Ghaziabad 201009 (UP)
- Ph: +91-9810101913 North:8700605929 South:9738594049 West:9625299466
 - email:info@arrdevpools.com, arrdevpools@yahoo.com,
- www.arrdevpools.com, www.wetfitaquagym.com www.theswimmingpool.in